

**Important Safety Information**

**READ ALL INSTRUCTIONS BEFORE INSTALLATION**

1. BEFORE INSTALLING THIS FIXTURE OR DOING ANY MAINTENANCE, MAKE SURE TO TURN OFF THE POWER SUPPLY AT THE CIRCUIT BREAKER OR FUSE BOX.
2. CHECK TO MAKE SURE THAT ALL INPUT CONDUIT CONNECTIONS HAVE BEEN PROPERLY MADE AND THE MODULE WILL BE GROUNDED TO AVOID POTENTIAL ELECTRICAL SHOCKS.
3. DO NOT HANDLE ENERGIZED MODULE WITH WET HANDS, WHEN STANDING ON WET OR DAMP SURFACES, OR IN WATER.

“THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED” and “CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D’INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS”

**Length of Cord Adjustment**

The cord that comes with the SC6-CM is 7 feet in length. To shorten the length, remove the strain relief (Fig.1) by inserting a small flat blade screwdriver into the side set screw and loosen. The strain relief will come off the end and the cord can be cut shorter. Once cord is the correct length (include 6" of strip wire length to your desired length) strip off 6 inches of the cord jacket to reveal the three wires underneath. Strip the three leads in preparation for installation. Thread the strain relief back onto the cord and tighten set screw. Next insert the strain relief into the cover plate, add lock washer and tighten with threaded bolt.

**To Install**

1. Connect supply wires to the fixture leads. Connect black supply wire to black fixture lead by twisting bare wire ends together. Connect white supply wire to white fixture lead by twisting bare wire ends together. To isolate connections, place wire nut connector over the twisted wire ends and tighten.
2. Connect copper ground wire from junction box (if applicable) to the green ground supply wire and the green ground fixture lead by twisting bare wire ends together. To isolate connections, place wire nut connector over the twisted wire ends and tighten.
3. Hold fixture near conical top and push wiring and connectors in to space underneath the top.
4. Align holes in conical top with holes in top of fixture. Start screws but do not tighten until all screws have been started.
5. Tighten screws.

Fig. 1


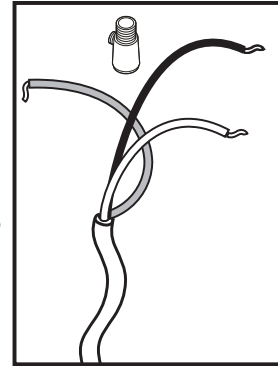


Fig. 2

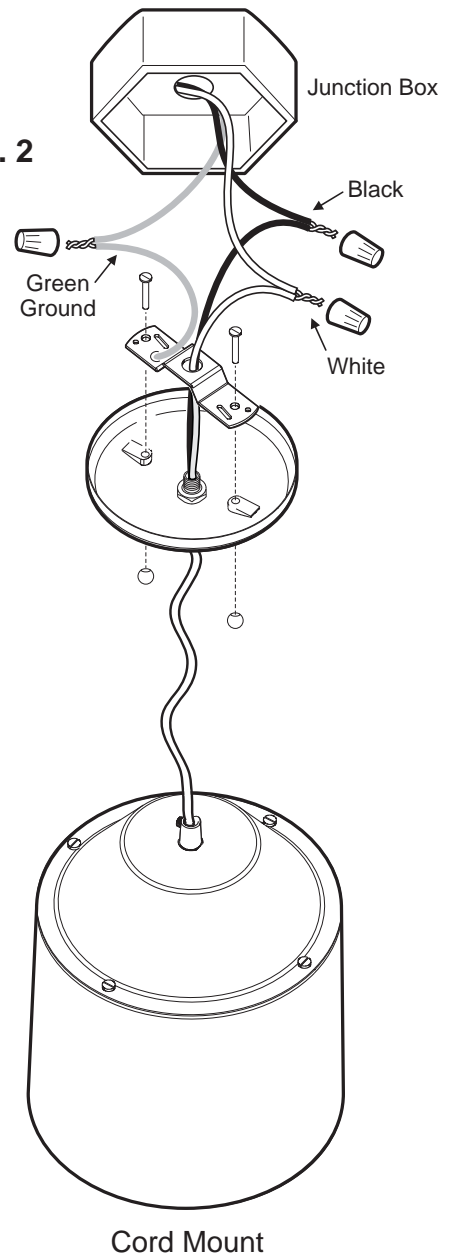

## LIMITED WARRANTY

LIMITED WARRANTY: The limited warranty set forth below is given by Cree LED Lighting Solutions. ("CreeLLS") with respect to the lighting product packaged with this limited warranty the "Product". Your Product, when delivered to you in new condition in its original packaging, is warranted against defects in materials or workmanship as follows: for a period of one (1) year from the date of original purchase, defective parts or a defective Product returned to CreeLLS, or its authorized service providers, as applicable, and proven to be defective upon inspection, will be repaired, or exchanged for a new Product, as determined by CreeLLS, or the authorized service provider. Loss of or damage to the Product due to abuse, mishandling, alteration, accident, electrical current fluctuations, failure to follow operating, maintenance or environmental instructions prescribed by CreeLLS in writing or services performed by someone other than CreeLLS or an authorized service provider. WARRANTY IS VOID IF PRODUCT IS NOT USED FOR THE PURPOSE FOR WHICH THIS PRODUCT IS MANUFACTURED. Any complaints regarding the product should be addressed to Cree LED Lighting, 635 Davis Drive, Suite 100, Morrisville, NC 27560.

NO IMPLIED WARRANTY, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, APPLIES TO THE PRODUCT AFTER THE APPLICABLE PERIOD OF THE EXPRESS LIMITED WARRANTY STATED ABOVE, AND NO OTHER EXPRESS WARRANTY OR GUARANTY, EXCEPT AS MENTIONED ABOVE, GIVEN BY ANY PERSON OR ENTITY WITH RESPECT TO THE PRODUCT SHALL BIND CreeLLS. (SOME STATES AND PROVINCES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY IN WHICH CASE THE ABOVE LIMITATION MAY NOT).

NOTE: "THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED" and "CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS" "CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR" "CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS"